


Series TFA

Two Arch Expansion Joint

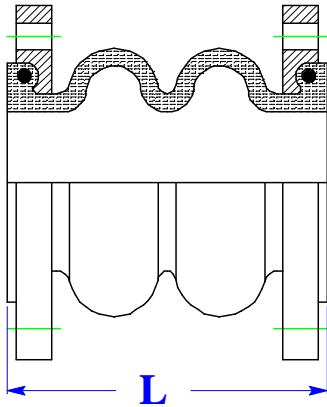

ONYX VALVE CO

Ph: 856-829-2888
Fax: 856-829-3080

835 Industrial Hwy
Cinnaminson NJ 08077

Standard materials of construction are Nitrile rubber with nylon reinforcement and galvanized steel backup rings. Butyl rubber, EPDM, are available from stock. End plates are available in 316 stainless steel. Control rods are available in galvanized carbon or 316 stainless steel.

		1.25	1.5	2	2.5	3	4	5	6	8	10	12	14	16	18	20
 Neutral Length "L"	L	7			9			13			13.75					
 Axial Compression	Axial Compression	2			2			2.36			2.36					
 Elongation	Elongation	1.25			1.37			1.37			1.37					
 Lateral Deflection	Lateral Deflection	1.75			1.60			1.37			1.37					
 Angular Deflection	Angular Deflection	±40°			±35°			±30°			±30°					
All dimensions are in inches. Specifications subject to change without notice. March 2004	P max	225 psi						225 psi			142 psi		125 psi			
	P burst	855 psi						855 psi			340 psi		340 psi			
	Vacuum	-26 inches Hg														
	Temp range	-14° to +220°F														