


Series OMEGA

Stainless Steel Flexible Connectors


Series S Screwed End Connections

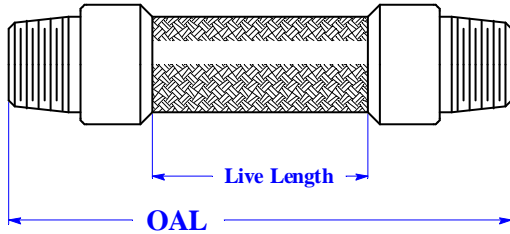

- Connections: (M)NPT x (M)NPT
- Pressure is in psi at 70°F
- End Connectors: Carbon steel
- Cover: Stainless steel single braid
- Weight is in lb
- All dimensions in inches

size	Model	OAL	Live L	P max	wt
0.50	S-050	6.5	2.25	1,000	0.6
0.75	S-075	7	2.25	750	0.8
1	S-100	8	3	525	1.0
1.25	S-125	8.5	3	490	1.5
1.50	S-150	9	3.5	450	2.0
2	S-200	10.5	4.5	400	2.8
2.50	S-250	12	5.5	285	4.0

Series F Flanged Connections

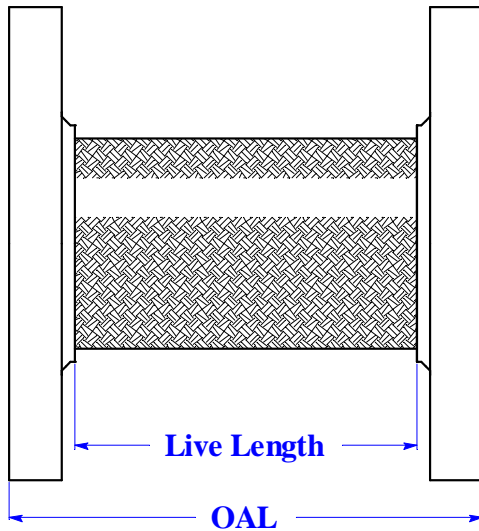

- Connections: 150 lb ANSI flanges
- Pressure is in psi at 70°F
- End Connectors: Carbon steel
- Cover: Stainless steel single braid
- Weight is in lb
- All dimensions in inches

size	Model	OAL	Live L	P max	wt
2	F-200	9	7	400	11
2.5	F-250	9	7	285	14
3	F-300	9	7	240	15
4	F-400	9	6.5	260	22
5	F-500	11	8.25	220	29
6	F-600	11	8.25	200	36
8	F-800	12	9	190	60
10	F-1000	13	10	165	85
12	F-1200	14	11	125	120

ONYX VALVE CO

Ph: 856-829-2888
 Fax: 856-829-3080

835 Industrial Hwy
 Cinnaminson NJ 08077